SCHOOL BUILT SHEDS

Builders® FirstSource

SCHOOL BUILT SHEDS

8x10 Storage Shed

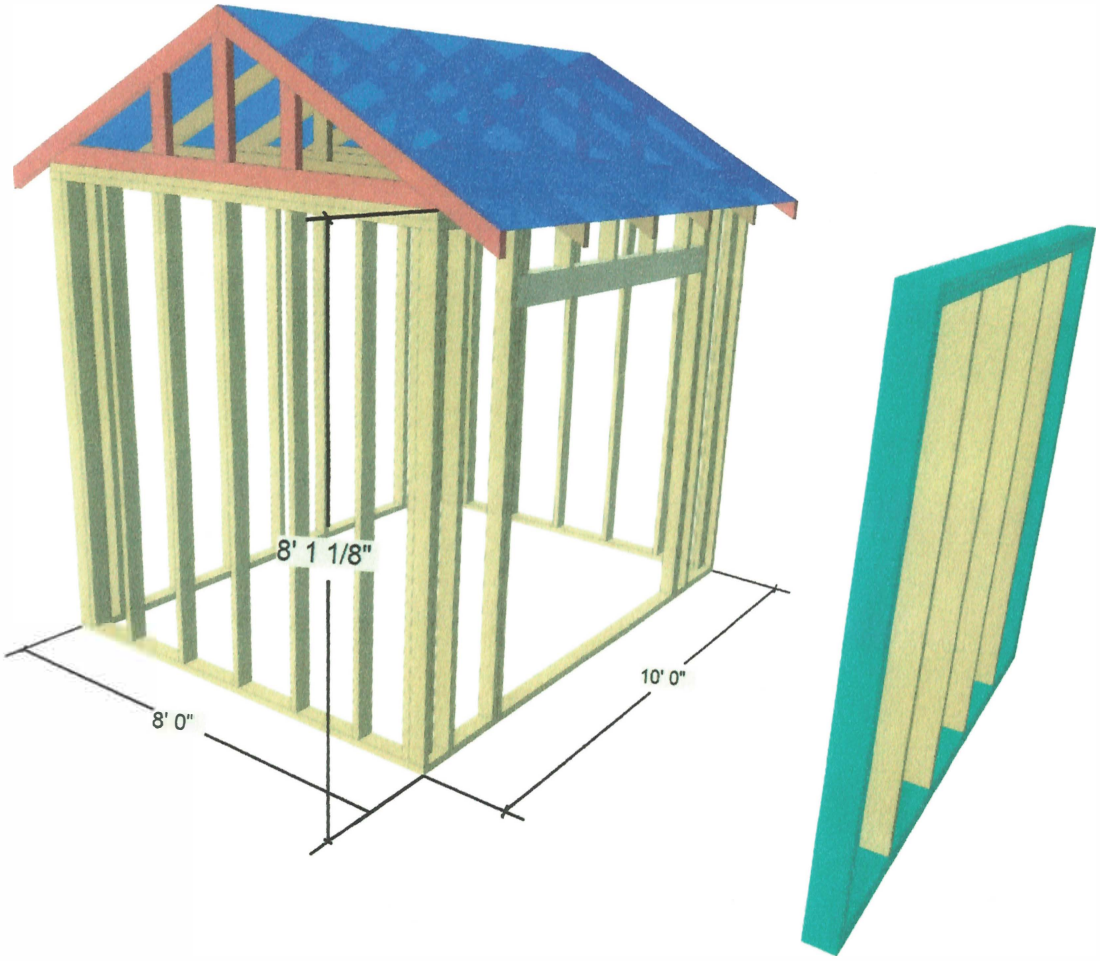

CAREERS in CONSTRUCTION

READY-FRAME
PRECISION PACKAGES BY BUILDERS FIRSTSOURCE

Job: CIC-WHS-Shop

Builder: Careers in Const SW WA
Plan: 8x10 Shed
Designer: WW

Ready-Frame Elevations

Date: 01/14/2026 09:32:02

Level: 1st Floor 5183074 | Bundle: <None> | Panel: FLOOR SYSTEM

Stud Spacing	BF	Weight
2'	100	213.00 lb

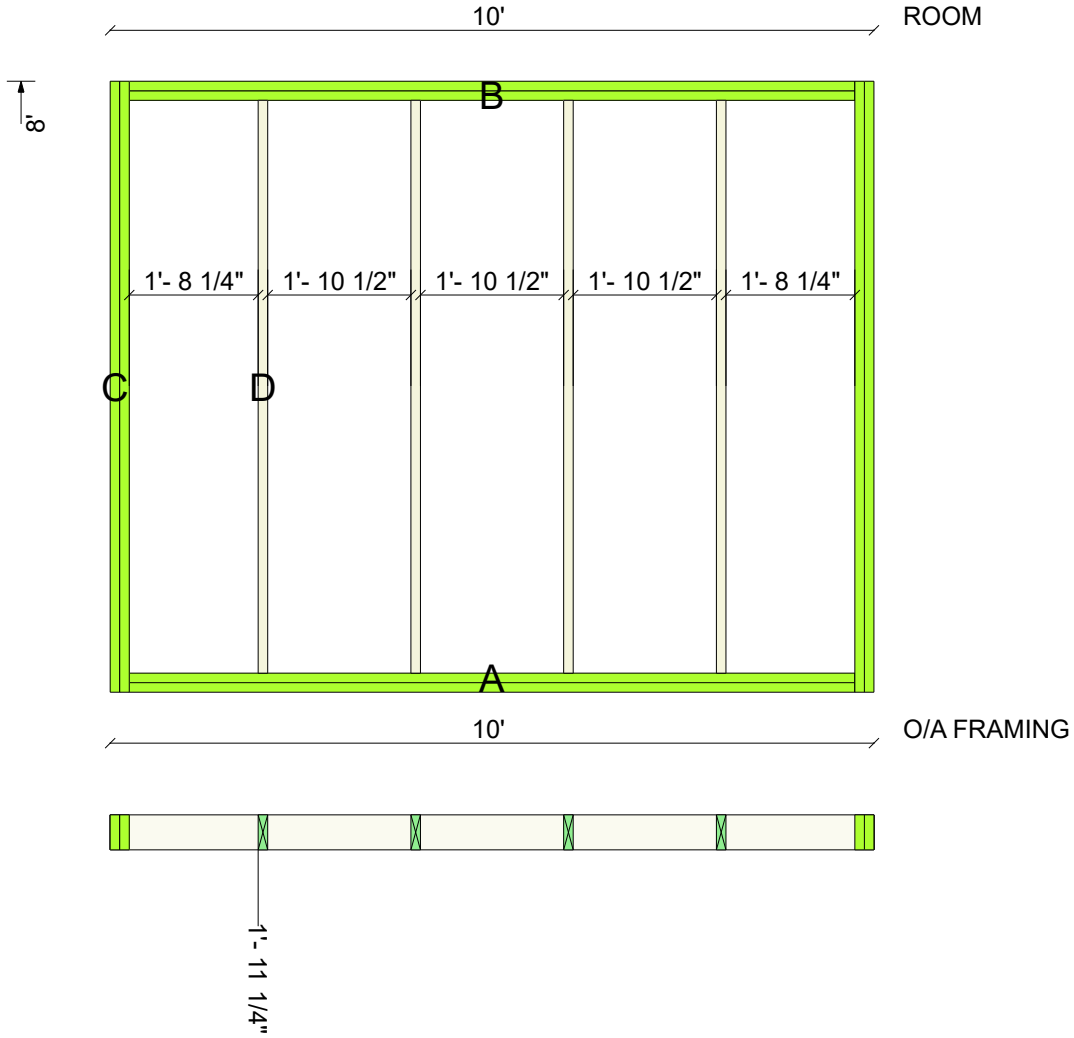

Cutting List

Lbl	Member	Description	Qty	Length
A	Bottom Plate	2x6 DF No.2	(2)	9'- 6"
B	Top Plate	2x6 DF No.2	(2)	9'- 6"
C	Stud	2x6 DF Stud	(4)	8'
D	Stud	2x6 DF Stud	(4)	7'- 6"

FLOOR SYSTEM

READY-FRAME
PRECISION PACKAGES BY BUILDERS FIRSTSOURCE

Job: CIC-WHS-Shop

Builder: Careers in Const SW WA
Plan: 8x10 Shed
Designer: WW

Ready-Frame Elevations

Date: 01/14/2026 09:32:02

Level: 1st Floor 5183074 | Bundle: <None> | Panel: E101

Stud Spacing	BF	Weight
1'- 4"	89	181.00 lb

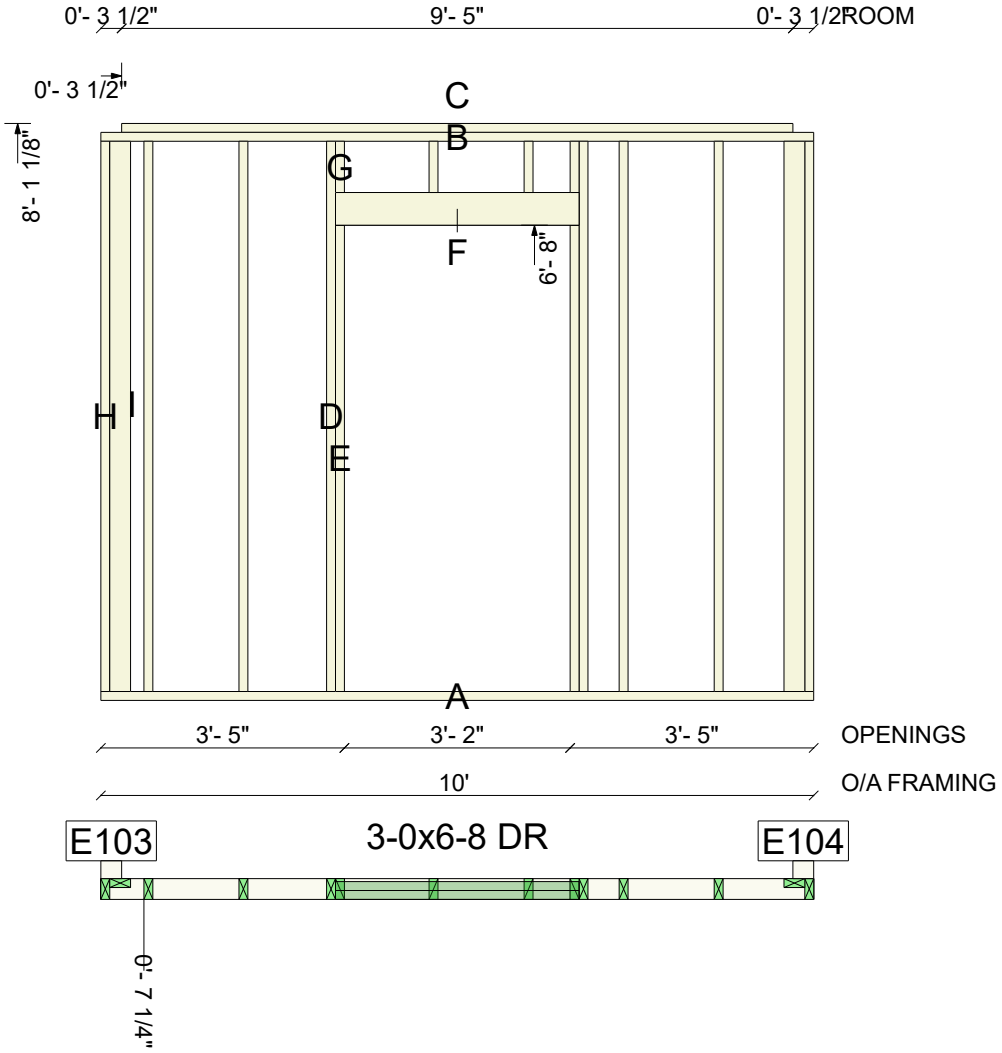

Cutting List

Lbl	Member	Description	Qty	Length
A	Bottom Plate	2x4 DF No.2	(1)	10'
B	Top Plate	2x4 DF No.2	(1)	10'
C	VTP	2x4 DF No.2	(1)	9'- 5"
D	King Stud	2x4 DF Stud	(2)	7'- 8 5/8"
E	Trimmer	2x4 DF No.2	(2)	6'- 6 1/2"
F	Header	2x6 DF No.2	(2)	3'- 5"
G	Header Cripple	2x4 DF No.2	(4)	0'- 8 5/8"
H	Stud	2x4 DF Stud	(6)	7'- 8 5/8"
I	Flat Stud	2x4 DF Stud	(2)	7'- 8 5/8"

READY-FRAME
PRECISION PACKAGES BY BUILDERS FIRSTSOURCE

Job: CIC-WHS-Shop

Builder: Careers in Const SW WA
Plan: 8x10 Shed
Designer: WW

Ready-Frame Elevations

Date: 01/14/2026 09:32:02

Level: 1st Floor 5183074 | Bundle: <None> | Panel: E102

Stud Spacing	BF	Weight
1'- 4"	76	155.00 lb

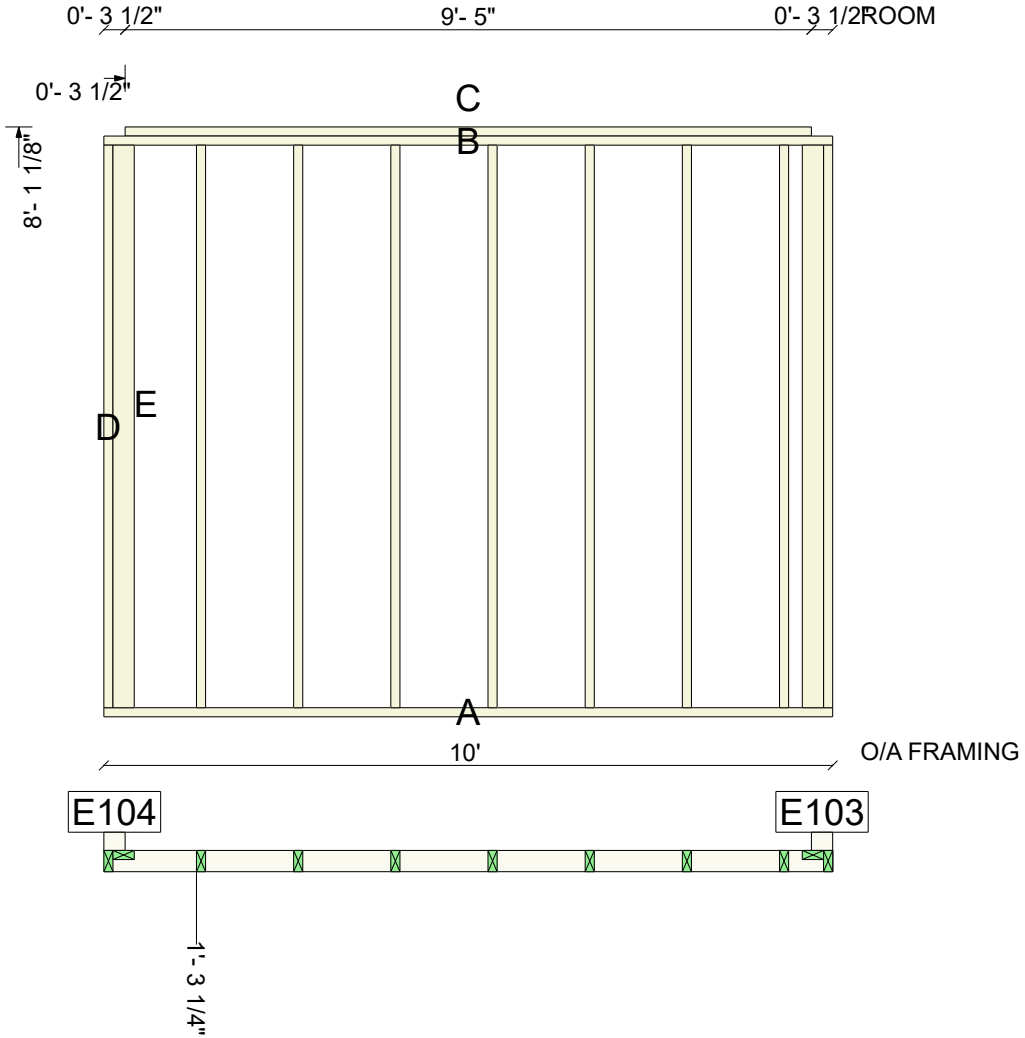

Cutting List

Lbl	Member	Description	Qty	Length
A	Bottom Plate	2x4 DF No.2	(1)	10'
B	Top Plate	2x4 DF No.2	(1)	10'
C	VTP	2x4 DF No.2	(1)	9'- 5"
D	Stud	2x4 DF Stud	(9)	7'- 8 5/8"
E	Flat Stud	2x4 DF Stud	(2)	7'- 8 5/8"

E102

READY-FRAME
PRECISION PACKAGES BY BUILDERS FIRSTSOURCE

Job: CIC-WHS-Shop

Builder: Careers in Const SW WA
Plan: 8x10 Shed
Designer: WW

Ready-Frame Elevations

Date: 01/14/2026 09:32:02

Level: 1st Floor 5183074 | Bundle: <None> | Panel: E103

Stud Spacing	BF	Weight
1'- 4"	51	104.00 lb

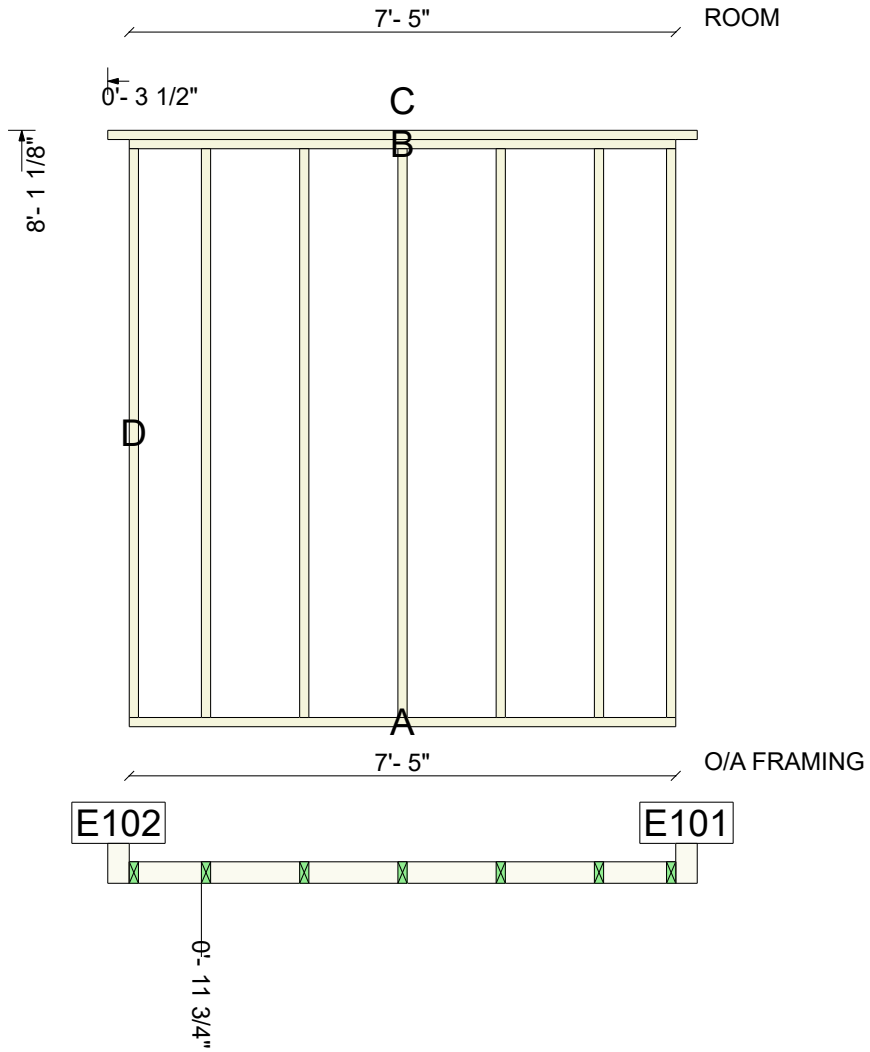

Cutting List

Lbl	Member	Description	Qty	Length
A	Bottom Plate	2x4 DF No.2	(1)	7'- 5"
B	Top Plate	2x4 DF No.2	(1)	7'- 5"
C	VTP	2x4 DF No.2	(1)	8'
D	Stud	2x4 DF Stud	(7)	7'- 8 5/8"

READY-FRAME
PRECISION PACKAGES BY BUILDERS FIRSTSOURCE

Job: CIC-WHS-Shop

Builder: Careers in Const SW WA
Plan: 8x10 Shed
Designer: WW

Ready-Frame Elevations

Date: 01/14/2026 09:32:02

Level: 1st Floor 5183074 | Bundle: <None> | Panel: E104

Stud Spacing	BF	Weight
1'- 4"	51	104.00 lb

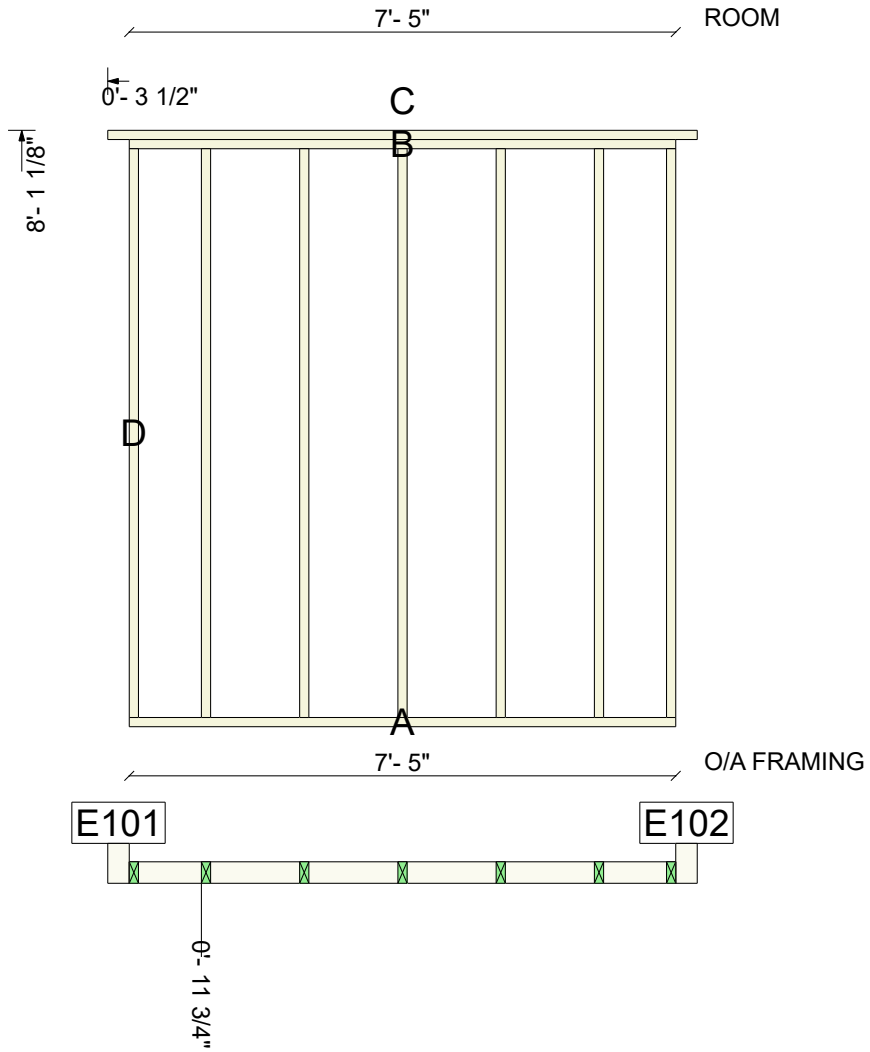

Cutting List

Lbl	Member	Description	Qty	Length
A	Bottom Plate	2x4 DF No.2	(1)	7'- 5"
B	Top Plate	2x4 DF No.2	(1)	7'- 5"
C	VTP	2x4 DF No.2	(1)	8'
D	Stud	2x4 DF Stud	(7)	7'- 8 5/8"

READY-FRAME®
PRECISION PACKAGES BY BUILDERS FIRSTSOURCE

Job: CIC-WHS-Shop
Builder: Careers in Const SW WA
Plan: 8x10 Shed
Designer: WW

Ready-Frame Material & Labor

Date: 01/14/2026 09:32:01

Level: 1st Floor 5183074 **Bundle: <None>**

Ready-Frame Material

2x4 DF No.2

Qty	Stock Length	LF	BF
(4)	2'	8'	5.33
(8)	8'	64'	42.67
(6)	10'	60'	40
Sub Totals (18)		**132'**	**88**

2x6 DF No.2

Qty	Stock Length	LF	BF
(2)	4'	8'	8
(4)	10'	40'	40
Sub Totals (6)		**48'**	**48**

2x6 DF Stud

Qty	Stock Length	LF	BF
(4)	7'- 6"	30'	30

Totals	**210'**	**166**

STOP! Material past this line should not be included in the work order.

Pre-cut Material

2x4 DF Stud

Qty	Stock Length	LF	BF
(35)	7'- 8 5/8"	270'- 1 7/8"	180.1

2x6 DF Stud

Qty	Stock Length	LF	BF
(4)	8'	32'	32

READY-FRAME®
PRECISION PACKAGES BY **BUILDERS FIRSTSOURCE**

As an effort to continually improve efficiency and reduce waste **The Wall Elevations are available through any smart device with a QR Code** on your Layout page, as seen here and on your Layout Sheet for Reference.

This is how you will use these for the future:

1. Open the Camera in your Smart Device
2. Hover over the QR code so it is visible within your screen
3. A pop up with a web-link will turn up on your screen automatically
4. Tap the web-link pop up
5. The Wall Elevations will pull up on a webpage for you to view.

Here is an Example:

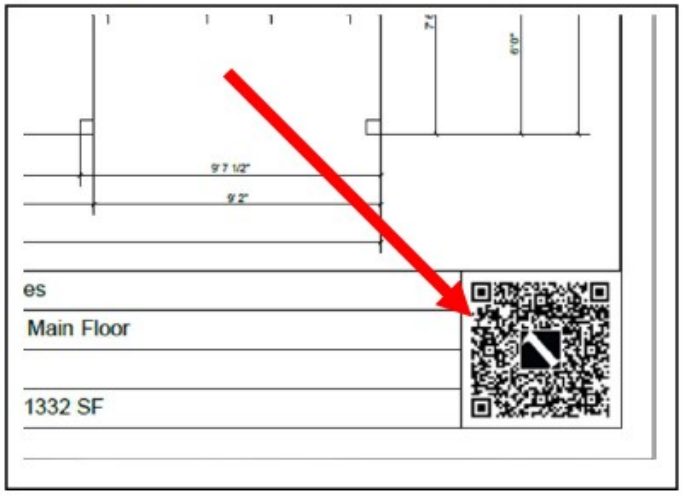

READY-FRAME®
PRECISION PACKAGES BY **BUILDERS FIRSTSOURCE**

WALL NUMBERING

E = Exterior Wall
P = Interior Wall
G = Garage Wall
F = Fireplace Wall
100's are 1st floor walls
200's are 2nd floor walls
300's are 3rd floor walls

PLATE MARKINGS

X = Stud
K = King
T = Trimmer
C = Cripple
UP = Flat Stud Up
DWN = Flat Stud Down
2-4 = Door Callout
6-0x6-0 = Window Callout

WALL NUMBERING

E = Pared Exterior
P = Pared Interior
G = Pared del garaje
F = Pared de la chimenea
100's son paredes de 1er piso
200's son paredes de 2er piso
300's son paredes de 3er piso

PLATE MARKINGS

X = Perno
K = Pilar o columna padre
T = Recortadora
C = Lisiado
UP = Perno plano hacia arriba
DWN = Perno plano hacia abajo
2-4 = Llamada puerta
6-0x6-0 = Ventana llamada

READY-FRAME®

PRECISION PACKAGES BY **BUILDERS FIRSTSOURCE**

Guide to Successful Installation

1) Locate the book. The book will be shipped with the plates and component bundles. The book has the layout and wall elevations that identifies each wall and component by number and letter.
2) Most deliveries of Better Framing Systems material will include 2-3 units of pre-cut material. One unit will contain all of the plates, one will contain all of the components and headers. Some larger builds will have a separate header pack. Note – all of the studs, sheet goods, loose materials and hardware will be packaged and shipped the same as on a normal lumber package.
3) Each wall section will be numbered differently and will be stacked in the order they are to be built. The wall numbers on the material will match the exact same numbers on the layout provided with the book. The floor and wall layout must be built per plan, any deviation will require the plates provided to be altered on site.

   Material Management

   A) The plates are bundled and stacked in order with exterior walls on top, wall E101 and E102 on the very top with higher numbered walls lower in the bundle. Most framers have found it helpful to place all the exterior plates in their approximate location and then set out wall components with the plates before framing any walls. Interior plates will be under the exterior plates stacked from lowest number on top to highest number on the bottom.
   B) The component pieces for window and doors will be bundled together by wall number. Headers, trimers, sills, cripples and some special studs will be in these bundles. As mentioned, standard studs are shipped in their own units.
   C) Each component is printed with a label E101, A, B, C, etc. The label identifies the wall and where in the wall the components will go. The components are stacked lower numbers on top to higher numbers down in the stack, sometimes items are stacked out of sequence in order to be able to ship safely.

4) Frame the house. Enjoy the increased production that the Better Framing System provides.

   At Builders First Source we strive for quality and customer service if you have any questions or concerns, please feel free to contact your sales rep or Richard Todd, Design Manager at 971-471-2022 or Richard.todd@bldr.com

MiTek®

MiTek, Inc.
400 Sunrise Ave., Suite 270
Roseville, CA 95661
916.755.3571

Re: 4246685
CTE Shed - 8x10 Shed

The truss drawing(s) referenced below have been prepared by MiTek USA, Inc. under my direct supervision based on the parameters provided by Builders FirstSource (Beaverton, OR).

Pages or sheets covered by this seal: R84515516 thru R84515517

My license renewal date for the state of Washington is April 30, 2025.

September 24,2024

Reinmuth, Dustin

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

Job	Truss	Truss Type	Qty	Ply	CTE Shed - 8x10 Shed	
4246685	A01	Common Supported Gable	2	1	Job Reference (optional)	R84515516

Builders FirstSource (Beaverton, OR), Beaverton, OR - 97005,

Run: 8.63 S Jul 12 2024 Print: 8.630 S Jul 12 2024 MiTek Industries, Inc. Tue Sep 24 10:25:33
ID:4L6Buxlakn_fhAaPSUN0szyaS48-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

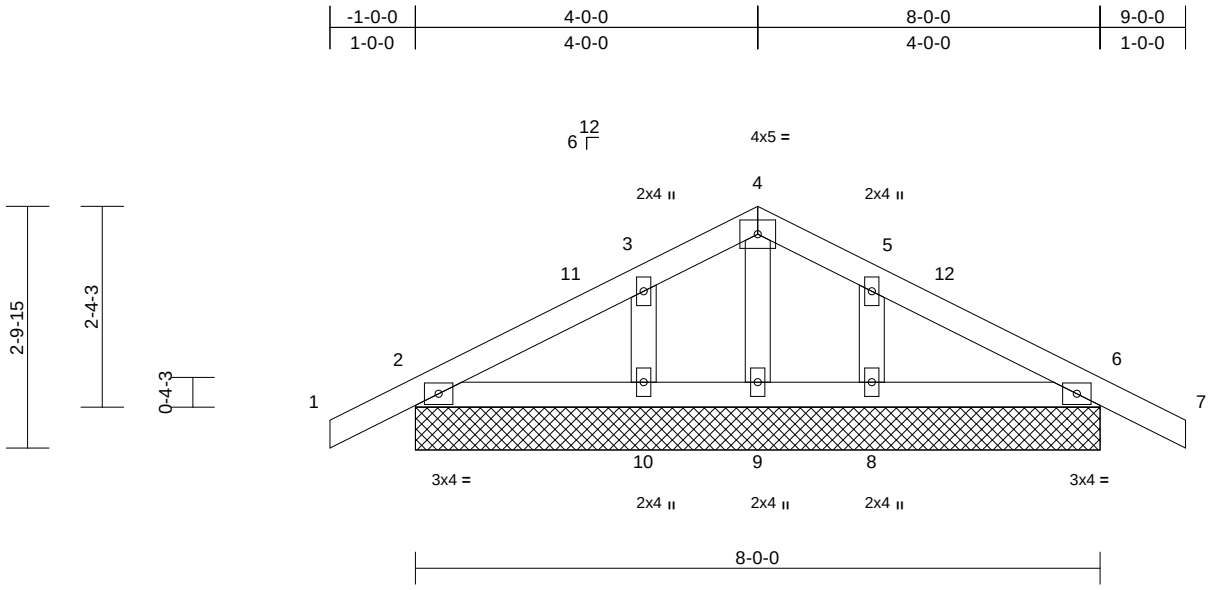

Scale = 1:26.9

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	25.0	Plate Grip DOL	1.15	TC	0.07	Vert(LL)	n/a	-	n/a	999	MT20	220/195
Snow (Pf)	25.0	Lumber DOL	1.15	BC	0.03	Vert(CT)	n/a	-	n/a	999		
TCDL	7.0	Rep Stress Incr	YES	WB	0.03	Horz(CT)	0.00	6	n/a	n/a		
BCLL	0.0*	Code	IRC2021/TPI2014	Matrix-SH								
BCDL	10.0										Weight: 32 lb	FT = 10%

LUMBER
TOP CHORD 2x4 DF No.1&Btr
BOT CHORD 2x4 DF No.1&Btr
OTHERS 2x4 DF No.2

BRACING
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size) 2=8-0-0, 6=8-0-0, 8=8-0-0, 9=8-0-0, 10=8-0-0
Max Horiz 2=46 (LC 16)
Max Uplift 2=-50 (LC 16), 6=-59 (LC 17), 8=-75 (LC 17), 10=-76 (LC 16)
Max Grav 2=268 (LC 23), 6=268 (LC 24), 8=304 (LC 24), 9=48 (LC 29), 10=304 (LC 23)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/44, 2-3=-68/59, 3-4=-51/128, 4-5=-51/129, 5-6=-68/59, 6-7=0/44
BOT CHORD 2-10=-23/91, 9-10=-23/91, 8-9=-23/91, 6-8=-23/91
WEBS 4-9=-62/14, 3-10=-243/206, 5-8=-243/206

NOTES
1) Unbalanced roof live loads have been considered for this design.
2) Wind: ASCE 7-16; Vult=140mph (3-second gust) Vasd=111mph; TCDL=4.2psf; BCDL=6.0psf; h=25ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Corner(3E) -1-0-0 to 2-0-0, Exterior(2N) 2-0-0 to 4-0-0, Corner(3R) 4-0-0 to 7-0-0, Exterior(2N) 7-0-0 to 9-0-0 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
4) TCLL: ASCE 7-16; Pr=25.0 psf (roof LL: Lum DOL=1.15 Plate DOL=1.15); Pf=25.0 psf (Lum DOL=1.15 Plate DOL=1.15); Is=1.0; Rough Cat B; Fully Exp.; Ce=0.9; Cs=1.00; Ct=1.10
5) Unbalanced snow loads have been considered for this design.
6) This truss has been designed for greater of min roof live load of 12.0 psf or 1.00 times flat roof load of 25.0 psf on overhangs non-concurrent with other live loads.
7) Gable requires continuous bottom chord bearing.
8) Gable studs spaced at 1-4-0 oc.
9) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
10) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
11) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 50 lb uplift at joint 2, 59 lb uplift at joint 6, 76 lb uplift at joint 10 and 75 lb uplift at joint 8.

LOAD CASE(S) Standard

September 24,2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcscomponents.com)

MiTek®
400 Sunrise Ave., Suite 270
Roseville, CA 95661
916.755.3571 / MiTek-US.com

Job	Truss	Truss Type	Qty	Ply	CTE Shed - 8x10 Shed R84515517
4246685	A02	Common	4	1	Job Reference (optional)

Builders FirstSource (Beaverton, OR), Beaverton, OR - 97005,

Run: 8.63 S Jul 12 2024 Print: 8.630 S Jul 12 2024 MiTek Industries, Inc. Tue Sep 24 10:25:34
ID:0kExJdmqGPENwTjoZvQUxOyaS46-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

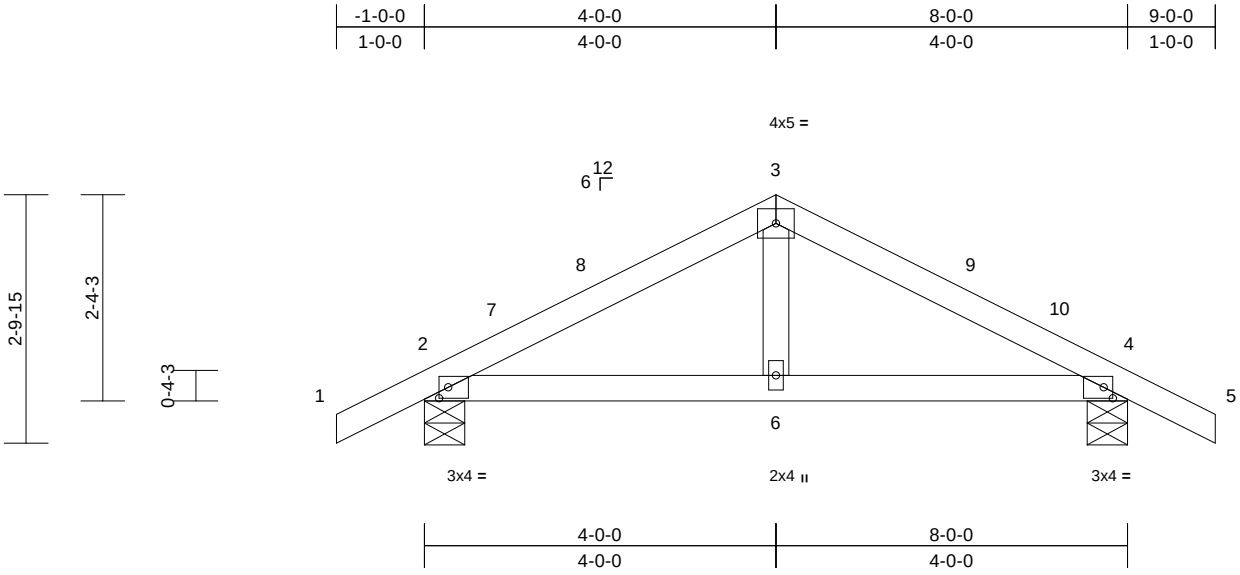

Scale = 1:26.2

Plate Offsets (X, Y): [2:0-1-4,0-1-8], [4:0-1-4,0-1-8]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	25.0	Plate Grip DOL	1.15	TC	0.17	Vert(LL)	-0.01	2-6	>999	240	MT20	220/195
Snow (Pf)	25.0	Lumber DOL	1.15	BC	0.11	Vert(CT)	-0.01	2-6	>999	180		
TCDL	7.0	Rep Stress Incr	YES	WB	0.03	Horz(CT)	0.00	4	n/a	n/a		
BCLL	0.0*	Code	IRC2021/TPI2014	Matrix-SH								
BCDL	10.0										Weight: 29 lb	FT = 10%

LUMBER
TOP CHORD 2x4 DF No.1&Btr
BOT CHORD 2x4 DF No.1&Btr
WEBS 2x4 DF No.2

BRACING
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size) 2=0-5-8, 4=0-5-8
Max Horiz 2=46 (LC 20)
Max Uplift 2=-98 (LC 16), 4=-98 (LC 17)
Max Grav 2=535 (LC 23), 4=535 (LC 24)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/45, 2-3=-464/214, 3-4=-464/213, 4-5=0/45
BOT CHORD 2-6=-75/318, 4-6=-75/318
WEBS 3-6=0/172

NOTES
1) Unbalanced roof live loads have been considered for this design.
2) Wind: ASCE 7-16; Vult=140mph (3-second gust) Vasd=111mph; TCDL=4.2psf; BCDL=6.0psf; h=25ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior(2E) -1-0-0 to 2-0-0, Interior (1) 2-0-0 to 4-0-0, Exterior(2R) 4-0-0 to 7-0-0, Interior (1) 7-0-0 to 9-0-0 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
3) TCLL: ASCE 7-16; Pr=25.0 psf (roof LL: Lum DOL=1.15 Plate DOL=1.15); Pf=25.0 psf (Lum DOL=1.15 Plate DOL=1.15); Is=1.0; Rough Cat B; Fully Exp.; Ce=0.9; Cs=1.00; Ct=1.10
4) Unbalanced snow loads have been considered for this design.
5) This truss has been designed for greater of min roof live load of 12.0 psf or 1.00 times flat roof load of 25.0 psf on overhangs non-concurrent with other live loads.
6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
7) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 98 lb uplift at joint 2 and 98 lb uplift at joint 4.

LOAD CASE(S) Standard

September 24,2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcscomponents.com)

MiTek®
400 Sunrise Ave., Suite 270
Roseville, CA 95661
916.755.3571 / MiTek-US.com

Symbols

PLATE LOCATION AND ORIENTATION



Center plate on joint unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.



For 4 x 2 orientation, locate plates 0- 1/16" from outside edge of truss.

This symbol indicates the required direction of slots in connector plates.

* Plate location details available in MiTek software or upon request.

PLATE SIZE

4 x 4

The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.

BEARING



Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number/letter where bearings occur. Min size shown is for crushing only.

Industry Standards:

ANSI/TPI1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-22: Design Standard for Bracing.
BCSI: Building Component Safety Information, Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

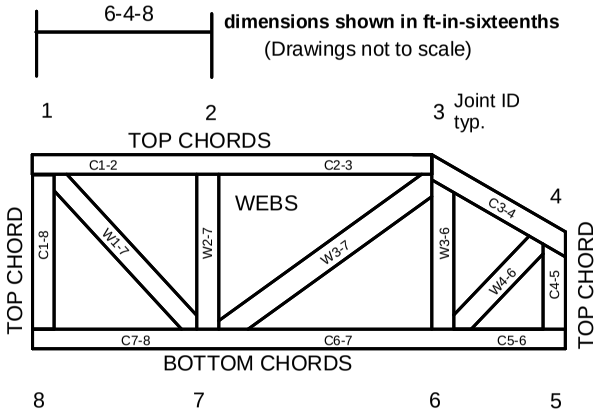

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

Product Code Approvals

ICC-ES Reports:

ESR-1988, ESR-2362, ESR-2685, ESR-3282
ESR-4722, ESL-1388

Design General Notes

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TPI 1 section 6.3 These truss designs rely on lumber values established by others.

© 2023 MiTek® All Rights Reserved

MiTek®

General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TPI 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TPI 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TPI 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.

TRIANGLE SHAPE ▲ INDICATES LEFT END ON LAYOUT AND TRUSS DRAWING ON STAMPED ENGINEERING PAGE

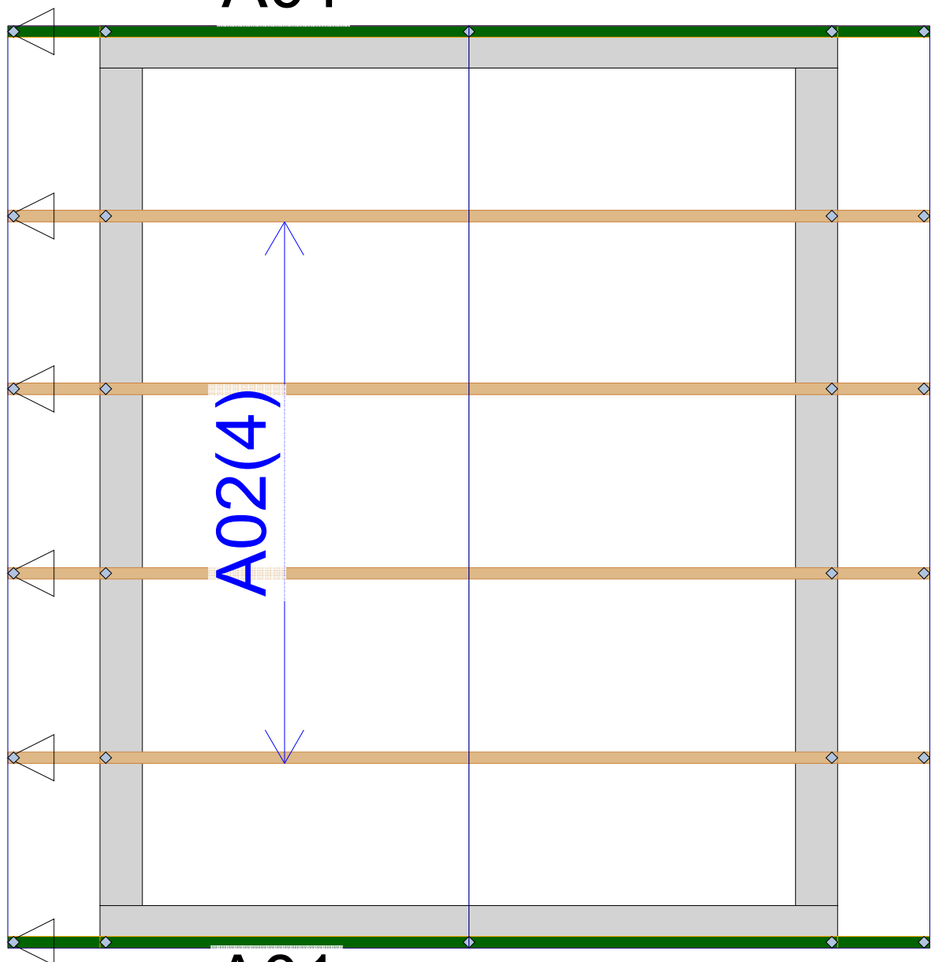

TC LL = 25
TC DL = 7
BC LL = 0
BC DL = 10
Total Load = 42
Wind Speed = 140 Mph
Exposure = B
Roof pitch = 6/12
Overhang = 12"

THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See the individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the roof and floor system and for the overall structure. The design of the truss support structure including headers, beams, walls, and columns is the responsibility of the building designer. For general guidance regarding bracing, consult "Bracing of wood trusses" available from the Truss Plate Institute, 583 D'Onifrio Drive; Madison, WI 53179

Jurisdiction Stamp

DO NOT CUT, DRILL, NOTCH OR MODIFY TRUSS MEMBERS WITHOUT PRIOR APPROVAL FROM BUILDERS FIRSTSOURCE TRUSS

Builders FirstSource

SW Washington and Oregon Components
Woodland Office: 360-841-5900
Beaverton Office: 971-371-5971

BUILDER : CTE Shed
PROJECT : 8' x 10' Shed
ADDRESS : WA

DATE : 9/24/2024
SALESMAN : Vince Rogers
SCALE: NTS
PROJECT #: **4246685**
DESIGNER : Tyler Campbell

Standing Seam Metal Roof Layout

SK16_P 16" Skyline Roofing® Standard Stiffening Ribs 26G Cool Matte Black Dura Tech® XL
16 @ 5' 8"

R16_P Hip/Ridge 26G Cool Matte Black Dura Tech® XL 127 deg: **1-EA**

Z17_26_BARE Solid Zee Closure 26G ZINCALUME: **2-EA**

E17_P Wide Eave 26G Cool Matte Black Dura Tech® XL 117 deg: **2-EA**

G17_P Standard Gable G17 26G Cool Matte Black Dura Tech® XL: **5-EA**

WS14X1_MBK 14X1 WOODSCREW MATTE BLK (100CT): **2-EA**

WS9X1_MBK 9X1 WOODSCREW MATTE BLK (100CT): **1-EA**

WS10X1PH 10X1 WOODSCREW #2 SQ PANCAKE BARE (100CT): **2-EA**

ST12X3/4_MBK 12X3/4 STITCH SCREW MATTE BLK (100CT): **1-EA**

CLSK16 16" SKYLINE CLOSURE (32") POLY (4/PAC): **2-EA**

MAS3/3245 3/8" x 3/32" x 45' BUTYL MASTIC TAPE: **2-EA**

PPMBK .75 OZ TOUCH-UP PAINT PEN MATTE BLK: **1-EA**

5'8"	5'8"
5'8"	5'8"
5'8"	5'8"
5'8"	5'8"
5'8"	5'8"
5'8"	5'8"
5'8"	5'8"
5'8"	5'8"

ASC Skyline Panel Matte Black